



Hurricane Rated

Amarr® Residential Garage Doors



SELECT YOUR WIND LOAD DOOR


Steel Carriage House		Wind Speed Approvals*	Impact Resistant	Miami-Dade Approvals
6	AMARR CARRIAGE COURT	90—130 mph	I	
7	AMARR CLASSICA®	90—185 mph	I	M
8	AMARR HILLCREST	90—169 mph	I	
9	AMARR OAK SUMMIT®	90—165 mph	I	M
10	AMARR DESIGNER'S CHOICE	90—155 mph	I	
Steel Traditional		Wind Speed Approvals*	Impact Resistant	Miami-Dade Approvals
11	AMARR HERITAGE™	90—185 mph	I	M
12	AMARR LINCOLN	90—169 mph	I	
13	AMARR STRATFORD®	90—155 mph	I	M
14	AMARR OLYMPUS	90—155 mph	I	
Wood		Wind Speed Approvals*	Impact Resistant	Miami-Dade Approvals
16	AMARR BY DESIGN	110—175 mph	I	M
Aluminum Full View		Wind Speed Approvals*		
17	AMARR VISTA	90—151 mph		

*Based on ASCE7-05

UNDERSTAND YOUR WIND LOAD REQUIREMENTS

Local government regulations for wind load requirements can vary from one location to another due to door size, the door's location on the structure, and localized wind zones, among other factors. The homeowner is responsible to make sure their garage door meets local building codes.

United States East Coast & Gulf Wind Zones

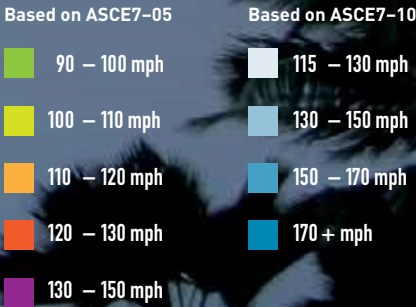

AMARR ADVANTAGE

STYLISH STRENGTH



With Amarr garage doors, you don't have to compromise style for hurricane preparedness. Almost all Amarr residential garage doors are available with a wind load reinforcement system that meets or exceeds building code requirements in your area. Whether your home is traditional or contemporary, our Amarr garage door designs can add beauty, curb appeal and long lasting value to your home.

HURRICANE RATED DOORS

When installed according to our instructions and local building codes, Amarr hurricane rated garage doors:



- Withstand rapid cyclic pressure and static load forces up to 245 mph.¹
- Resist large missile impact at 50' per second (35 mph).²
- May qualify for discounts on your homeowner's insurance.³

Meet or exceed these building codes:

- Florida Building Code (FBC)
- International Code Council (ICC)
- Texas Department of Insurance (TDI)
- High-Velocity Hurricane Zone (HVHZ)
- M** (Miami – Dade and Broward Counties)



WIND LOAD APPROVED DOORS

Use a variety of reinforcement materials, including Struts and R-Trusses which are engineered to meet specific building code requirements. Amarr garage doors are tested in accordance with DASMA TDS-108. Impact glass is available in short and long panel windows on select Amarr garage doors; impact glass may shatter, but remains intact despite the force.



SAFETY



Our SafeGuard System features patented center and end hinges, exclusive safety bottom brackets and uniquely-designed pinch protection

sections to enhance overall safety for homeowners.

These garage doors are designed to reduce the risk of serious hand and finger injuries.



ENERGY EFFICIENCY

Maintain the temperature in your garage with a garage door with a high R-value rating. We offer a wide range of materials, insulations and door thicknesses to provide the level of energy efficiency you desire.

SUSTAINABILITY

Amarr products are made with up to 90% recycled content and approximately 5-10% of the steel is reused at the steel mill.

MADE IN USA



All Amarr residential and commercial steel and aluminum garage doors are manufactured in the USA, affirming our commitment to high quality and durability.

AMARR CONSTRUCTION

STEEL

SINGLE-LAYER: Steel

Amarr Classica, Oak Summit, Hillcrest, Heritage, Stratford, & Lincoln

- Heavy-duty Exterior Steel
- Durable, Reliable, Low Maintenance



DOUBLE-LAYER: Steel + Insulation

Amarr Classica, Oak Summit, Hillcrest, Heritage, Stratford, & Lincoln




- Heavy-duty Exterior Steel
- Durable, Reliable, Low Maintenance
- Environmentally Safe Polystyrene Thermal Insulation with Vinyl Backing
- Energy Efficient
- Quiet Operation



TRIPLE-LAYER: Steel + Insulation + Steel

Amarr Classica, Designer's Choice, Hillcrest, Heritage, Lincoln, & Olympus

- Heavy-duty Exterior and Interior Steel
- Durable, Reliable, Low Maintenance
- Environmentally Safe Polystyrene or Polyurethane Thermal Insulation
- Superior Energy Efficiency
- Extra Quiet Operation




* True White Bead Board only.
** All panels and colors except True White Bead Board.
† True White Short and Flush panels only.
‡ All panels and colors except True White Short and Flush panels.

FOUR-LAYER: Overlay + Steel + Insulation + Steel

Amarr Carriage Court

- Heavy-duty Exterior and Interior Steel
- Durable, Reliable, Low Maintenance
- Environmentally Safe Polystyrene Thermal Insulation
- Energy Efficient
- Extra Quiet Operation




WOOD

Wood + Insulation + Wood

Amarr by Design

- Custom, Handcrafted Carriage House Designs
- Multiple Wood Options
- Paint or Stain Grade Wood
- Environmentally Safe Polystyrene Thermal Insulation
- Energy Efficient




ALUMINUM

Aluminum + Glass

Amarr Vista

- 2" thick extruded commercial-grade aluminum frame for durability
- Corrosion resistant aluminum
- ClearView Strut System strengthens door without restricting view





Tanglewood design with Closed Arch in Wicker Tan/White with Versailles decorative hardware




Northampton design in Walnut with Versailles decorative handles and hinges

AMARR CARRIAGE COURT


Distinctly defined. The Amarr Carriage Court collection adds increased curb appeal to your home. Built with durable composite overlay trim and insulated steel-backed sections, these garage doors provide energy efficiency, noise reduction and innovative design to your home.

DESIGNS

AVAILABLE WITH WINDOWS

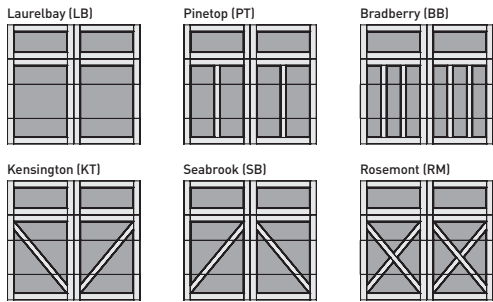

NOT AVAILABLE WITH WINDOWS

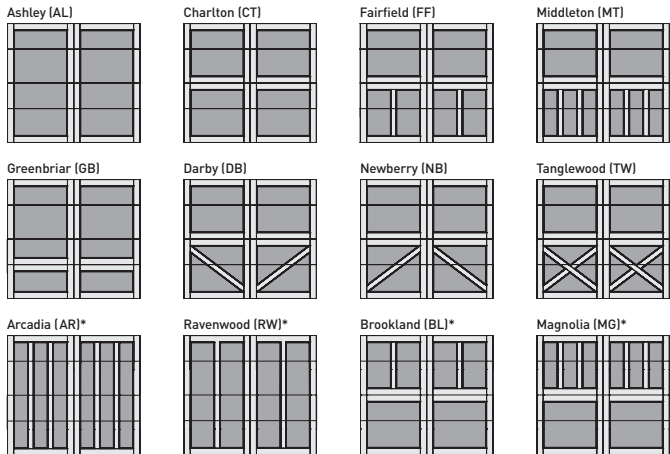


*Closed Square only.

CC4000
Four-Layer:
Overlay + Steel + Insulation + Steel


CC4000
R-VALUE
6.48

Decorative Windows & Hardware
Optional decorative windows & hardware add character to your door.
See page 15 for all window and decorative hardware options.

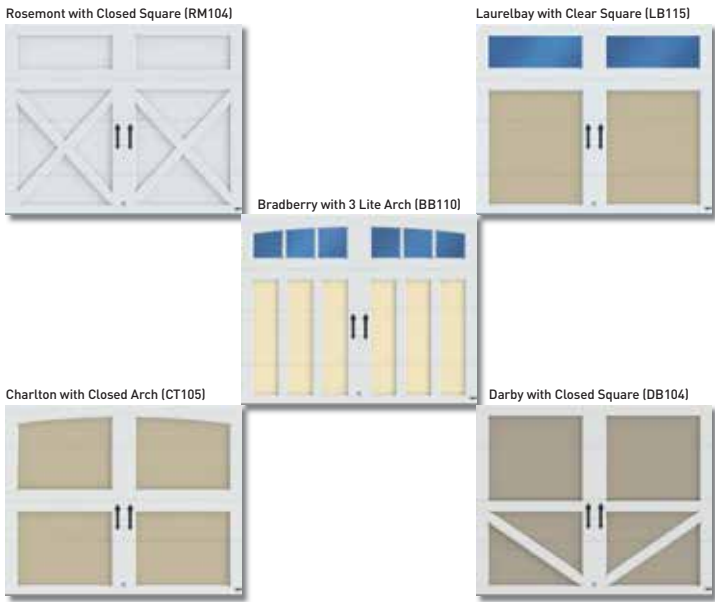

COLORS

Actual paint colors may vary from samples shown. Amarr steel doors are pre-painted; for custom colors, exterior latex paint must be used.

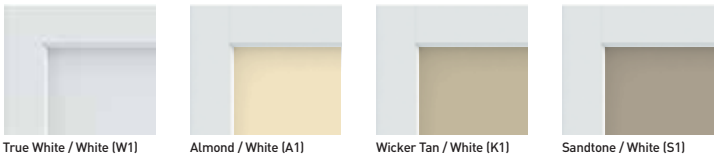

Door, window frames, and overlay can be painted using 100% acrylic exterior latex paint with a Light Reflective Value (LRV) of 8 or higher. Contact paint manufacturer for LRV ratings.

WIND LOAD APPROVALS


Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH/ MPH* (PSF Design Pressures)	Impact Resistant	Windows	
				Standard	Impact
Amarr Carriage Court CC4000 	9'	90 – 130 mph 116 – 168 mph (12.7/-14.9) – (26.4/-31.1)	Yes ³	Yes ³	No
	16'	90 – 130 mph 116 – 168 mph (12.1/-13.8) – (25.3/-28.7)	Yes ³	Yes ³	No
	18'	90 – 130 mph 116 – 168 mph (12.0/-13.6) – (25.1/-28.4)	Yes ³	Yes ³	No

Tested in accordance with DASMA TDS-108 ¹ Based on ASCE7-05 ² Based on ASCE7-10 ³ Option available on select models

AMARR CLASSICA

Looks can be deceiving. From a distance, you see wood. Up close, it's sturdy, durable, low-maintenance steel. Attractive and structurally strong carriage house styles that go up and down like traditional garage doors. Three-section tall designs, instead of four, help deliver a more authentic carriage house look. Deception never looked so good.

DESIGNS

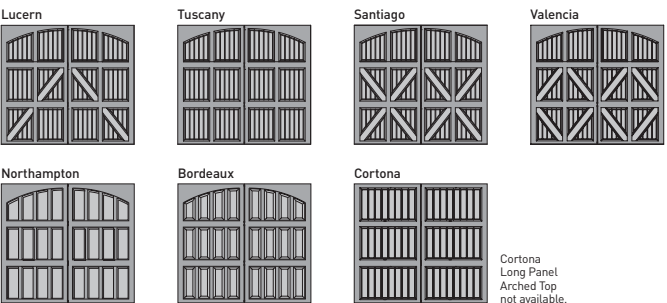

Cortona
Long Panel
Arched Top
not available.

CL1000
Single-Layer:
Steel

CL2000
Double-Layer:
Steel + Insulation

CL3000
Triple-Layer:
Steel + Insulation + Steel

CL3000
R-VALUE
13.35

Decorative Windows & Hardware

Optional decorative windows & hardware add character to your door.
See page 15 for all window and decorative hardware options.

COLORS

Actual paint colors may vary from samples shown. Amarr steel doors are pre-painted; for custom colors, exterior latex paint must be used.



*Odd heights only available in CL3000.
†Price upcharge applies; odd heights only available in CL3000.
‡Price upcharge applies.

TWO-TONE PAINT OPTIONS*

PANEL	BASE DOOR							
	True White	Almond	Wicker Tan	Sandtone	Terratone	Charcoal Gray	Dark Brown	Black
True White								
Almond								
Wicker Tan								
Sandtone								
Terratone								
Charcoal Gray								
Dark Brown								
Black								
Hunter Green								
Gray								

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH/ MPH* (PSF Design Pressures)	Impact Resistant	Windows	
				Standard	Impact
Amarr Classica CL3000 	9'	90 – 180 mph 116 – 232 mph (12.8/-15.1) – (50.8/-59.8)	Yes	Yes	Yes ³
	16'	90 – 151 mph 116 – 194 mph (12.2/-13.8) – (33.7/-38.1)	Yes	Yes	Yes ³
	18'	90 – 151 mph 116 – 194 mph (12.2/-13.8) – (33.7/-38.1)	Yes	Yes	Yes ³
Miami-Dade		N/A	N/A	N/A	N/A
Amarr Classica CL1000 and CL2000 	9'	90 – 185 mph 116 – 235 mph (12.7/-14.9) – (54.4/-62.0)	Yes ³	Yes ³	No
	16'	90 – 175 mph 116 – 225 mph (12.3/-13.9) – (45.9/-52.1)	Yes ³	Yes ³	No
	18'	90 – 160 mph 116 – 205 mph (12.2/-13.8) – (38/-43.0)	Yes ³	Yes ³	No
Miami-Dade	9'	185 mph 235 mph (54.4/-62.0)	Yes	No	No
	16'	169 mph 218 mph (43.4/-49.3)	Yes	No	No

Tested in accordance with DASMA TDS-108 ¹ Based on ASCE7-05 ² Based on ASCE7-10 ³ Option available on select models



Raised design with Arched Thames DecraTrim windows in Wicker Tan with Alpine handles



Recessed design with Thames DecraTrim in Sandtone with Alpine handles


AMARR HILLCREST

Value is a beautiful thing. With the Amarr Hillcrest collection you get more than a custom carriage house look. You get exceptional style and durability with conventional hardware at a competitive price.

Bead Board design with Wagon Wheel DecraTrim in True White with Blue Ridge decorative handles and hinges



Long Bead Board with Stockton DecraTrim (LPBB20)



Raised with Waterford DecTrim (RS25)



Bead Board with Cascade DecraTrim (BB23)



Recessed with Thames DecraTrim (RE30)



Raised (RS)



AMARR OAK SUMMIT

Self-expression shouldn't cost a fortune. With the Amarr Oak Summit collection, it won't. These durable steel doors offer an attractive carriage house look. Choose from a variety of door colors, decorative hardware, and window accents. Customize your look with our most affordable carriage house door.

Bead Board design in Golden Oak with Blue Ridge decorative handles and hinges



Raised with Cascade DecraTrim (RS23)



Long Bead Board with Stockton DecraTrim (LPBB20)



Recessed with Arched Thames DecraTrim (RE31)




Bead Board with Prairie DecraTrim (BB21)



Recessed (RE)




DESIGNS



HI1000
Single-Layer:
Steel



HI2000
Double-Layer:
Steel + Insulation



HI3138 NEW
1-3/8" Triple-Layer:
Steel + Insulation
+ Steel




HI3000
2" Triple-Layer:
Steel + Insulation
+ Steel

Decorative Windows & Hardware

Choose DecraTrim window inserts to coordinate with your home's design along with optional decorative hardware. See page 15 for all window and decorative hardware options.

COLORS




*Price upcharge applies.
*Available in HI3138 only.

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH/ MPH* (PSF Design Pressures)	Impact Resistant	Windows	
				Standard	Impact
Amarr Hillcrest HI3000 Lifetime Limited Warranty	9'	90 – 155 mph 123 – 200 mph (14.3/-16.9) – (38.0/-45.0)	Yes ³	LP ³	LP ³
	16'	90 – 155 mph 123 – 200 mph (12.3/-13.9) – (36.4/-41.4)	Yes ³	LP ³	LP ³
	18'	90 – 155 mph 123 – 200 mph (12.2/-13.8) – (36.1/-40.8)	Yes ³	LP ³	LP ³
Amarr Hillcrest HI3138 Lifetime Limited Warranty	9'	90 – 155 mph 120 – 200 mph (14.3/-16.9) – (38.0/-45.0)	Yes ³	LP ³	LP ³
	16'	90 – 130mph 117 – 155mph (12.3/-13.9) – (25.6/-29.1)	Yes ³	LP ³	LP ³
	18'	90 – 130mph 116 – 168mph (12.2/-13.8) – (25.4/-28.7)	Yes ³	LP ³	LP ³
Amarr Hillcrest HI1000 and HI2000 15-Year Limited Warranty 25-Year Limited Warranty	9'	90 – 169mph 116 – 218mph (12.8/-15.1) – (45.2/-53.4)	Yes ³	LP ³	No
	16'	90 – 130 mph 116 – 168 mph (12.3/-13.9) – (25.6/-29.1)	No	LP ³	No
	18'	90 – 130 mph 116 – 187 mph (12.2/-13.8) – (31.6/-35.7)	No	No	No

Tested in accordance with DASMA TDS-108 ¹ Based on ASCE7-05 ² Based on ASCE7-10 ³ Option available on select models


DESIGNS



OS1000
Single-Layer:
Steel





OS2000
Single-Layer:
Steel + Insulation



Decorative Windows & Hardware

Give your door a unique carriage house look with a variety of decorative window and hardware options. See page 15 for all window and decorative hardware options.

COLORS



*Price upcharge applies.

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH/ MPH* (PSF Design Pressures)	Impact Resistant	Windows	
				Standard	Impact
15-Year Limited Warranty 25-Year Limited Warranty	9'	90 – 169 mph 123 – 214 mph (14.3/-16.9) – (45.3/-51.2)	Yes ³	SP ³ , LP ³	SP ³
	16'	90 – 156 mph 116 – 202 mph (12.3/-13.9) – (38.0/-42.0)	Yes ³	SP ³ , LP ³	SP ³
	18'	90 – 155 mph 116 – 200 mph (12.2/-13.8) – (37.0/-40.6)	Yes ³	SP ³ , LP ³	SP ³
M Miami-Dade	16'	156 mph 202 mph (38.0/-42.0)	Yes	No	SP ³

Tested in accordance with DASMA TDS-108 ¹ Based on ASCE7-05 ² Based on ASCE7-10 ³ Option available on select models



OS1000 and OS2000 Short Panel (SP) impact windows and panel designs are slightly misaligned by no more than 1.594"; returns and replacements not accepted. To see detailed drawing, contact sda.engineering@entrematic.com



Bead Board design in True White with Blue Ridge handles



Long Panel design with Thames DecraTrim windows in Walnut

AMARR DESIGNER'S CHOICE

Energy efficiency makes the Amarr Designer's Choice a popular choice for garage doors. With a high R-value of 19.40[†], this door gives you the ultimate in energy efficiency and quiet operation.

Bead Board design in True White with Blue Ridge handles and hinges



Bead Board with Cascade DecraTrim (BB23)



Long Bead Board with Stockton DecraTrim (LPBB20)



Raised Closed (RS)



Bead Board with Thames DecraTrim (BB30)



Recessed with Moonlite DecraTrim (RE24)



AMARR HERITAGE

Tradition never goes out of style. Choose from four different panel designs to create the steel garage door you always wanted. The Amarr Heritage collection features low-maintenance, heavy gauge steel doors in your choice of traditional styles. Great looks for years to come.


Long Bead Board design with Moonlite DecraTrim in True White with Blue Ridge handles and hinges



DESIGNS

CARRIAGE HOUSE ^{NEW}


Bead Board




Long Bead Board



Recessed




Raised




TRADITIONAL

Short Panel



Long Panel



Flush Panel*



Ribbed Panel*



HR1000
Single-Layer:
Steel

HR2000
Double-Layer:
Steel + Insulation

HR3000
Triple-Layer:
Steel + Insulation + Steel

HR3000
R-VALUE
9.05


Decorative Windows

Choose from DecraTrim window inserts to coordinate with your home. See page 15 for all window options.

*Available in Amarr Heritage HR3000 only

DESIGNS


Bead Board




Long Bead Board



Recessed



Raised



DC3138[†]
Triple-Layer:
Steel + Insulation + Steel

DC3138
R-VALUE
14.46

DC3200
Triple-Layer:
Steel + Insulation + Steel

DC3200
R-VALUE
19.40[†]

Decorative Hardware

Choose decorative hardware to best coordinate with your home. See page 15 for hardware options.

*DC3138 only available in Bead Board design.
†DC3138 only available in 8', 9' or 16' wide doors.
‡For True White Bead Board only. 13.35 R-value for all other panels and colors.

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH/ ^{MPH} (PSF Design Pressures)	Impact Resistant	Windows	
				Standard	Impact
Amarr Designer's Choice DC3200 	9'	90 – 155 mph 116 – 200 mph (12.8/-15.1) – (38.0/-44.9)	Yes ³	Yes	Yes
	16'	90 – 155 mph 116 – 200 mph (12.3/-13.9) – (37.0/-41.0)	Yes ³	Yes	Yes
	18'	90 – 155 mph 116 – 200 mph (12.3/-13.9) – (37.0/-40.6)	Yes ³	Yes	Yes
Amarr Designer's Choice DC3138 	9'	90 mph 116 mph (12.8/-15.1)	No	No	No
	16'	90 mph 116 mph (12.3/-13.9)	No	No	No

Tested in accordance with DASMA TDS-108 ¹ Based on ASCE7-05 ² Based on ASCE7-10 ³ Option available on select models

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH/ ^{MPH} (PSF Design Pressures)	Impact Resistant	Windows	
				Standard	Impact
Amarr Heritage HR3000 	9'	90 – 190 mph 120 – 245 mph (14.3/-16.9) – (57.0/-67.5)	Yes ³	SP, LP ³ 	SP ³ , LP ³
	16'	90 – 175 mph 117 – 224 mph (14.1/-14.1) – (48.0/-52.0)	Yes ³	SP, LP ³ 	SP ³ , LP ³
	18'	90 – 165mph 116 – 212mph (12.2/-13.8) – (42.0/-46.0)	Yes ³	SP ³ , LP ³ 	SP ³ , LP ³
	9'	190 mph 245 mph (57.0/-67.5)	Yes	No	SP, LP
	16'	175 mph 225 mph (48.0/-52.0)	Yes	No	SP ³ , LP ³
	18'	165 mph 212 mph (42.0/-46.0)	Yes	No	SP, LP
Amarr Heritage HR1000 and HR2000 	9'	90 – 169 mph 123 – 214 mph (14.3/-16.0) – (45.3/-51.2)	Yes ³	SP ³ , LP ³	SP ³
	16'	90 – 185 mph 116 – 239 mph (12.3/-13.9) – (51.9/-58.9)	Yes ³	SP ³ , LP ³	SP ³
	18'	90 – 155 mph 116 – 200 mph (12.2/-13.8) – (37.0/-40.6)	Yes ³	SP ³ , LP ³	SP ³
	9'	169 – 189 mph 214 – 244 mph (45.3/-51.2) – (57.0/-67.0)	Yes	No	SP ³
	16'	156 – 185 mph 202 – 239 mph (38.0/-42.0) – (47.5/-52.0)	Yes	No	SP ³
	18'	165 – 180 mph 212 – 232 mph (42.0/-46.0) – (48.6/-55.0)	Yes	No	SP ³

Tested in accordance with DASMA TDS-108 ¹ Based on ASCE7-05 ² Based on ASCE7-10 ³ Option available on select models

COLORS

Actual paint colors may vary from samples shown. Amarr steel doors are pre-painted; for custom colors, exterior latex paint must be used.



*Price upcharge applies.

COLORS

Actual paint colors may vary from samples shown.



Woodgrain finishes are dual directional for all panel designs. Amarr steel doors are pre-painted; for custom colors, exterior latex paint must be used. *Price upcharge applies.

MOSAIC WINDOWS



With Mosaic Window Options you decide the number and location of the windows. Only available for HR3000 traditional designs with Standard or Impact glass.



Long Panel design in True White



Short Panel design in Terratone

AMARR LINCOLN

Exceptional value: Energy efficient, 2" thick traditional style garage doors with conventional hardware at competitive prices.

Short Panel design with Cascade DecraTrim windows in Sandtone



AMARR STRATFORD

Time-honored style. The Amarr Stratford collection offers 4 traditional designs, 11 color choices, and 21 decorative window options. This durable low-maintenance collection provides section interfaces designed to reduce the risk of serious finger and hand injuries. The Amarr Stratford collection. A statement of style.

Long Panel design with Sunray DecraTrim windows in Sandtone



Short Panel with Wagon Wheel DecraTrim (SP26)



Ribbed Panel (RP)*




Long Panel with Arched Thames DecraTrim (LP31)



Short Panel with Stockton DecraTrim (SP20)



Flush Panel (FP)*



DESIGNS

Short Panel

LI1000
Single-Layer:
Steel

Long Panel

LI2000
Double-Layer:
Steel + Insulation

Flush Panel*

LI3138 NEW
1-3/8" Triple-Layer:
Steel + Insulation
+ Steel

Ribbed Panel†

LI3000
2" Triple-Layer:
Steel + Insulation
+ Steel

* LI1000/LI2000 Flush Panel has stucco texture; LI3000 has woodgrain texture.
† Available in LI3000 only.

LI3000
R - VALUE
9.05

Decorative Options
Choose DecraTrim window inserts to coordinate with your home's design. See page 15 for all window options.

COLORS

Actual paint colors may vary from samples shown.

Amarr steel doors are pre-painted; for custom colors, exterior latex paint must be used.

True White (TW)*

Almond (AL)*

Wicker Tan (WK)*

Sandtone (ST)*

Terratone (TT)*

Charcoal Gray (EF)*

Dark Brown (DN)*

Black (BL)*

Hunter Green (HG)‡

Gray (GY)‡

Golden Oak (OK)†

Walnut (NT)†

Mahogany (MY)†

Amarr® Color Zone

See page 18 for more information.†

* Available in LI1000/LI2000 Flush Panel design with stucco texture.
‡ Available in LI3138 only.
† Price upcharge applies.

Woodgrain finishes are dual directional for all panel designs.

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH/MPH ¹ (PSF Design Pressures)	Impact Resistant	Windows	
				Standard	Impact
Amarr Lincoln LI3000 	9'	90 – 155 mph 123 – 200 mph (14.3/-16.9) – (38.0/-45.0)	Yes ³	SP ³ , LP ³	SP ³ , LP ³
	16'	90 – 155 mph 123 – 200 mph (12.3/-13.9) – (36.4/-41.4)	Yes ³	SP ³ , LP ³	SP ³ , LP ³
	18'	90 – 155 mph 123 – 200 mph (12.2/-13.8) – (36.1/-40.8)	Yes ³	SP ³ , LP ³	SP ³ , LP ³
Amarr Lincoln LI3138 	9'	95 – 155 mph 123 – 200 mph (14.3/-16.9) – (38.0/-45.0)	Yes ³	SP ³ , LP ³	SP ³ , LP ³
	16'	90 – 130mph 117 – 155mph (12.3/-13.9) – (25.6/-29.1)	Yes ³	SP ³ , LP ³	SP ³ , LP ³
	18'	90 – 130mph 116 – 168mph (12.2/-13.8) – (25.4/-28.7)	Yes ³	SP ³ , LP ³	SP ³ , LP ³
Amarr Lincoln LI1000 and LI2000 	9'	90 – 169mph 116 – 218mph (12.8/-15.1) – (45.2/-53.4)	Yes ³	SP ³ , LP ³	LP ³
	16'	90 – 130 mph 116 – 168 mph (12.3/-13.9) – (25.6/-29.1)	No	SP, LP ³	No
	18'	90 – 130mph 116 – 187 mph (12.2/-13.8) – (31.6/-35.7)	No	SP	No

Tested in accordance with DASMA TDS-108 ¹ Based on ASCE7-05 ² Based on ASCE7-10 ³ Option available on select models

DESIGNS

Short Panel

ST1000
Single-Layer:
Steel

Long Panel

ST2000
Double-Layer:
Steel + Insulation

Flush Panel

Flush Panel has stucco texture.

Decorative Options
Choose from DecraTrim window inserts to coordinate with your home. See page 15 for all window options.

COLORS

Actual paint colors may vary from samples shown.

Amarr steel doors are pre-painted; for custom colors, exterior latex paint must be used.

True White (TW)*

Almond (AL)*

Wicker Tan (WK)*

Sandtone (ST)*

Terratone (TT)*

Dark Brown (DN)*

Golden Oak (OK)†

Walnut (NT)†

Mahogany (MY)†

Amarr® Color Zone

See page 18 for more information.†

* Available in ST1000/ST2000 Flush Panel design with stucco texture
† Price upcharge applies.

Woodgrain finishes are dual directional for all panel designs.

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH/MPH ¹ (PSF Design Pressures)	Impact Resistant	Windows	
				Standard	Impact
Amarr Stratford ST1000 and ST2000 	9'	90 – 169 mph 123 – 214 mph (14.3/-16.9) – (45.3/-51.2)	Yes ³	SP ³ , LP ³	SP ³
	16'	90 – 156 mph 116 – 202 mph (12.3/-13.9) – (38.0/-42.0)	Yes ³	SP ³ , LP ³	SP ³
	18'	90 – 155 mph 116 – 200 mph (12.2/-13.8) – (37.0/-40.6)	Yes ³	SP ³ , LP ³	SP ³
Miami-Dade	16'	156 mph 202 mph (38.0/-42.0)	Yes	No	SP ³

Tested in accordance with DASMA TDS-108 ¹ Based on ASCE7-05 ² Based on ASCE7-10 ³ Option available on select models



AMARR OLYMPUS

Energy efficiency makes Amarr Olympus doors popular models.

With a high R-value of 19.40[‡], these doors give you the ultimate in energy efficiency and quiet operation.

Long Panel design in True White



DESIGNS

Short Panel*

Long Panel

Flush Panel*

OL3138[‡]
Triple-Layer:
Steel + Insulation + Steel

OL3138
R-VALUE
14.46

OL3200
Triple-Layer:
Steel + Insulation + Steel

OL3200
R-VALUE
19.40[‡]

Flush Panel
available in
True White only.

Decorative Hardware
Choose decorative hardware to best coordinate with your home. See page 15 for hardware options.

* OL3138 only available in Flush and Short Panel designs.
‡ OL3138 only available in 8", 9" or 16" wide doors.
‡ For True White Short and Flush panels only.
13.35 R-value for all other panels and colors.

COLORS

Actual paint colors may vary from samples shown.

Amarr steel doors are pre-painted; for custom colors, exterior latex paint must be used.

True White (TW)

Almond (AL)

Wicker Tan (WK)

Sandtone (ST)

Dark Brown (DN)

Black (BL)*

Walnut (NT)*

Mahogany (MY)*

OL3138 only available in True White and Color Zone.

See page 18 for more information.*

*Price upcharge applies.

Short Panel with Sunray DecraTrim (SP27)

Long Panel with Moonlite DecraTrim (LP24)

Short Panel with Cathedral DecraTrim (SP22)

Short Panel with Stockton DecraTrim (SP20)

Long Panel with Prairie DecraTrim (LP21)

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH/ ¹ MPH ² (PSF Design Pressures)	Impact Resistant	Windows	
				Standard	Impact
Amarr Olympus OL3200 	9'	90 – 155 mph 116 – 200 mph (12.8/-15.1) – (38.0/-44.9)	Yes ³	Yes	Yes
	16'	90 – 155 mph 116 – 200 mph (12.3/-13.9) – (37.0/-41.0)	Yes ³	Yes	Yes
	18'	90 – 155 mph 116 – 200 mph (12.3/-13.9) – (37.0/-40.6)	Yes ³	Yes	Yes
Amarr Olympus OL3138 	9'	90 mph 116 mph (12.8/-15.1)	No	No	No
	16'	90 mph 116 mph (12.3/-13.9)	No	No	No

Tested in accordance with DASMA TDS-108 ¹ Based on ASCE7-05 ² Based on ASCE7-10 ³ Option available on select models

STEEL OPTIONS

GLAZING OPTIONS

Clear (C)

Obscure (O)*

Frost (WF)*

Dark Tint (WD)*

*Price upcharge applies.

*Available in Standard and Impact glass; price upcharge applies.

AMARR CLASSICA TOP SECTIONS

Closed Arch • Available for Tuscany (T1), Santiago (S1), Lucern (L1), Valencia (V1), Cortona (C1)

Closed Square • Cortona (C2)

Closed Arch • Northampton (N1)

Closed Square • Northampton (N2)

Closed Arch • Bordeaux (B1)

Closed Square • Bordeaux (B2)

Closed Square • Available for Tuscany (T2), Santiago (S2), Lucern (L2), Valencia (V2)

Closed Double Arch
Available for Tuscany (T1D), Santiago (S1D), Lucern (L1D), Valencia (V1D), Cortona (C1D)

No Insert

Danube (4)*

Madeira (5)*

Nile (6)*

Rhine (7)*

Seine (8)*

Thames (10)*

*Window inserts shown on Clear glass. Design also available with Obscure, Frost or Dark Tint glass.

AMARR CARRIAGE COURT TOP SECTIONS

FOR DESIGNS AVAILABLE WITH WINDOWS

Available for Laurel Bay, Pinetop, Bradberry, Kensington, Seabrook and Rosemont.

Available with Clear or Obscure glass only.

Closed Square (104)

Clear Square (115)

3 Lite Square (106)

4 Lite Square (107)

6 Lite Square (112)

8 Lite Square (113)

Closed Arch (105)

Clear Arch (114)

3 Lite Arch (110)

4 Lite Arch (111)

6 Lite Arch (108)

8 Lite Arch (109)

Available for Ashley, Charlton, Fairfield, Middleton, Greenbriar, Darby, Newberry and Tanglewood:

Closed Square (104)

Closed Arch (105)

FOR DESIGNS NOT AVAILABLE WITH WINDOWS

DECRA TRIM WINDOW INSERTS Available with Clear, Obscure, Frost or Dark Tint glass.

SHORT PANEL

Short Panel DecraTrim inserts available for Heritage, Stratford, and Lincoln collections.

No Insert

Cathedral (22)

Wagon Wheel (26)

Full Sunray (28) Available for 16", 17" and 18" widths only.

Stockton (20)

Cascade (23)

Wagon Wheel (26)

Five Piece Sunray (29) 10" in True White only.

Prairie (21)

Waterford (25)

Sunray (27)

LONG PANEL

Long Panel DecraTrim inserts available for Heritage, Stratford, Lincoln, Oak Summit, and Hillcrest collections.

No Insert

Cathedral (22)

Waterford (25)

Thames (30)

Stockton (20)

Cascade (23)

Wagon Wheel (26)

Arched Thames (31)

Prairie (21)

Moonlite (24)

Sunray (27)

Full Sunray (28) Available for 15.6", 15.8", 16", 17" and 18" widths only.

DECORATIVE HARDWARE

ALUMINUM

Available for Amarr Carriage Court, Classica, Hillcrest, Oak Summit, and Designer's Choice collections.

9" Handles

18" Strap Hinges With Clavos*

11" L-Hinge With Clavos*

10-1/2" Handles†

17" Strap Hinges With Clavos*

3-1/2" Ring Handles

VERSAILLES

CANTERBURY

*Hinges with Clavos not recommended for arched openings. †Not for use with high lift installations.

STAMPED STEEL

Available for Amarr Carriage Court, Classica, Hillcrest, Oak Summit, and Designer's Choice collections.

11" Handles

16" Strap Hinges

BLUE RIDGE

AMARR LOCK

11" Handles

ALPINE

MAGNETIC ABS VINYL

Available for Amarr Carriage Court[‡], Classica, Hillcrest, Oak Summit, and Designer's Choice collections.

12" Handles

16" Strap Hinges

CASTLE ROCK

11" Handles

18" Strap Hinges

MAPLE CREEK

[‡]2-sided adhesive disks must be purchased separately

4" Ring Handles (with removable backer plate)

10" tall

5" tall

18" STRAP HINGES

1-3/4" CLAVOS

NOTTINGHAM

CLAVOS

Terry design with studs and R.H. Hunt gate latch (custom stain by homeowner)

Clear Anodized frame with Obscure glass windows













AMARR BY DESIGN AD4000

Meticulously handcrafted for reliable performance.

These all-natural wood doors add striking beauty and value to your home. Unlimited custom designs available.

DESIGNS

Unlimited design options.

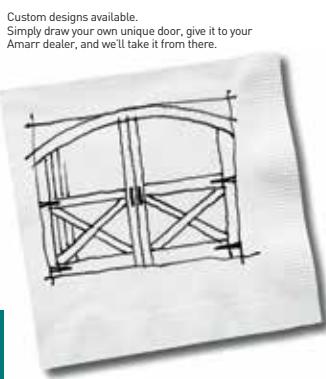

AD4000 Triple-Layer: Wood + Insulation + Wood

AD4000 R-VALUE 9.00

WOOD CHOICES

Other types of wood available upon request. Doors shipped natural.



Runion



Preston



Roberts



Sutcliffe



Curtis



WIND LOAD APPROVALS

Exposure B with mean roof height < 30'	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH ¹ /MPH ² (PSF Design Pressures)	Impact Resistant	Windows	
				Standard	Impact
Amarr by Design AD4000	10'	142 – 176 mph 194 – 229 mph [37.0/-37.0] – [50.0/-57.0]	Yes ³	Yes	Yes ³
	16'	158 mph 205 mph [40.0/-43.0]	Yes ³	Yes	No
	18'	111 – 159 mph 144 – 207 mph [21.0/-21.0] – [43.0/-43.0]	Yes ³	Yes	Yes ³
Miami-Dade ⁴	9'	169 – 185 mph 214 – 240 mph [45.3/-51.2] – [50.0/-62.0]	Yes	No	No
	16'	169 mph 218 mph [45.8/-49.3]	Yes	No	No
	18'	165 mph 212 mph [42.0/-46.0]	Yes	No	No

¹ Based on ASCE7-05

² Based on ASCE7-10


³ Option available on select models.

⁴ Miami-Dade wood doors require wood-on-steel base construction.

AMARR VISTA VI1000

It's the perfect reflection of your style. The modern industrial look goes residential with the introduction of the Amarr Vista collection. From the outside, these sleek doors perfectly mirror the clean lines and glass expanses of your home's contemporary design. Inside, they transform your garage into a bright and inviting room.

DESIGNS




GLASS

Glass is tempered and available as single pane or insulated.



*Laminated, not tempered. Insulated glass not available.

OPTIONAL PANELS

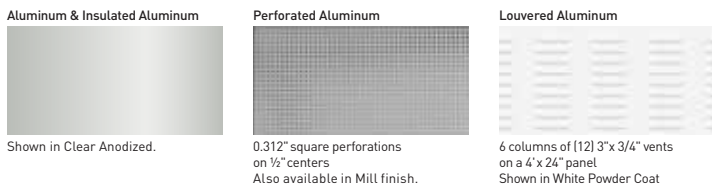

COLORS

Actual paint colors may vary from samples shown.

IN STOCK

ANODIZE



PAINT



SPECIAL ORDER

ANODIZE

Longer lead time and price upcharge may apply.




PAINT

PVDF (Kynar®) & Powder Coat

Longer lead time and price upcharge may apply.



	PVDF (Kynar®)	Powder Coat
FADE RESISTANT	++	+
CORROSION RESISTANT	++	+
UV RESISTANT	++	+
ABRASION RESISTANT	+	++
STANDARD COLORS	26	21
RAL/CUSTOM COLOR PRICE UPCHARGE	\$	\$\$
TOUCH-UP PAINT	Included	NOT included



WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	Wind Load Approved for Wind Speeds Ranging MPH ¹ /MPH ² (PSF Design Pressures)	Impact Resistant	Glass Available	
				Standard	Impact
Amarr Vista VI1000	9'	140 mph 180 mph [28.0/-33.1]	No	Yes	No
	12'	90 – 140mph 116 – 181mph [11.4/-13.1] – [27.6/-31.7]	No	Yes	No
	16'	90 – 151mph 116 – 194mph [11.1/-12.6] – [31.2/-35.3]	No	Yes	No

¹ Based on ASCE7-05

² Based on ASCE7-10



Fairfield design with Closed Square in True White/White with Alpine decorative handles



Our Philosophy. Since 1951, we have successfully raised the standards of quality, value, and dependability in the garage door industry. Today, with the same promise of individual attention and great value for all our customers, we remain committed to offering Amarr products and services that raise those standards even higher.

Visit amarr.com for additional products, such as Amarr by Design custom wood carriage house doors, specialty doors, garage flooring, accessories, and a full line of Amarr commercial sectional, rolling slat, and rolling steel doors.

Your Local Amarr Dealer:

Entrematic

165 Carriage Court
Winston-Salem, NC 27105
800.503.DOOR
www.amarr.com



Entrematic, Amarr, Classica, Heritage, Stratford, and Oak Summit as words and logos are trademarks owned by Entrematic Group AB or companies within the Entrematic Group.

Door specifications and technical data subject to change without notice.

Sectional door products from Entrematic may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents.

©Entrematic Group AB 2020. All rights reserved.
Printed in USA Form #6680520/4M/GVS